

THREE PHASE STRING INVERTER 75-100 KW

**CSI-75K-T480GL03-U | CSI-80K-T480GL03-U
CSI-90K-T480GL03-U | CSI-100K-T480GL03-U**



CSI Solar's grid-tied, transformer-less inverters help accelerate the use of three-phase architecture for commercial rooftop and small ground-mount applications. An NRTL approved, cost-effective alternative to central inverters, these inverters are modular design building blocks that provide high yield and enable significant BoS cost savings. They provide up to 98.8 % conversion efficiency and a wide operating rang for maximum energy harvest.




standard warranty, extension up to 20 years

KEY FEATURES

- Maximum efficiency of 98.8 %, Maximum EU efficiency of 98.3 %
- 8 / 9 /10 MPPT design with precise MPPT algorithm
- 16A input for each PV string
- Integrated DC Switches
- Smart string monitoring and IV curve diagnosis

EFFICIENCY CURVE

CSI-100K-T480GL03-U

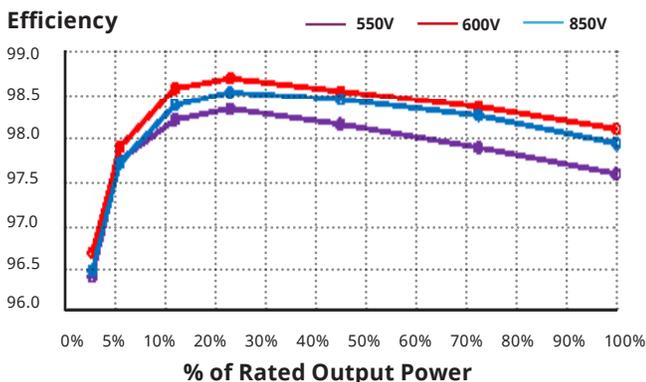

HIGH RELIABILITY

- Intelligent redundant fan-cooling
- SPD type II on both DC and AC sides
- Leakage current repression technology
- Fuse free design
- DC reverse polarity protection

BROAD ADAPTIBILITY

- NEMA 4X (IP65), outdoor application
- Utility interactive controls: Active power derating, reactive power control and over frequency derating
- Wide MPPT range for flexible string sizing
- High switching frequency and ultra fast MPPT for maximum efficiency over a wide load range

CSI SOLAR CO., LTD. is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading PV project developer and manufacturer of solar modules with over 46 GW deployed around the world since 2001, CSI Solar Co., Ltd. is one of the most bankable solar companies worldwide.

For detailed information, please refer to the Installation Manual.

CSI SOLAR CO., LTD.

199 Lushan Road, SND, Suzhou, Jiangsu, China, www.csisolar.com

SYSTEM/TECHNICAL DATA

MODEL NAME	CSI-75K-T480GL03-U	CSI-80K-T480GL03-U	CSI-90K-T480GL03-U	CSI-100K-T480GL03-U
DC INPUT				
Max. DC Input Voltage	1000 V _{DC}			
Rated voltage	600 V _{DC}			
Start-up DC Input Voltage/Power	195 V _{DC}			
Number of MPP Trackers	8	9	10	
MPPT Voltage Range	180 - 1000 V _{DC}			
Max. Input Current (Imp)	256 A (32 A per MPPT)	288 A (32 A per MPPT)	320 A (32 A per MPPT)	
Max. Short Circuit Current (Isc)	400 A (50 A per MPPT)	450 A (50 A per MPPT)	500 A (50 A per MPPT)	
Number of DC Inputs	16 (2 per MPPT)	18 (2 per MPPT)	20 (2 per MPPT)	
DC / AC Disconnection	Integrated			
AC OUTPUT				
Rated AC Output Power	75 kW	80 kW	90 kW	100 kW
Max. AC Output Power	75 kW	80 kW	90 kW	100 kW
Rated Output Voltage ¹	480 V _{AC}			
Grid Connection Type	3W / N / PE			
Rated Grid Output Current	52.0 A	55.6 A	62.5 A	69.4 A
Max Output Current	90.2 A	96.2 A	108.3 A	120.3 A
Rated Output Frequency	60 Hz			
Output Frequency Range ²	59.5 - 60.5 Hz			
Power Factor	> 0.99 (0.8 leading ... 0.8 lagging)			
Current THD	< 3 %			
DC Injection Current	< 0.5 % of Rated Grid Output Current			
SYSTEM				
Max. Efficiency	98.7 %		98.8 %	
EU Efficiency	98.3 %		98.2 %	
Night Consumption	< 2 W (Night)			
Anti-PID Module	Optional			
ENVIRONMENT				
Protection Degree	NEMA 4X (IP65)			
Cooling	Intelligent Redundant Fan - cooling			
Operating Temperature Range	-22 °F to +140 °F / -30 °C to +60 °C			
Storage Temperature Range	-40 °F to +176 °F / -40 °C to +80 °C			
Operating Humidity	0 - 100 % condensing			
Operating Altitude	13,123.4 ft / 4000 m			
Audible Noise	< 65 dBA @ 1 m			
DISPLAY AND COMMUNICATION				
Display	LCD			
Communication	RS485, Ethernet, Optional: Wi-Fi, Cellular			
MECHANICAL DATA				
Dimensions (W / H / D)	1065 x 567 x 344.5 mm / 41.9 x 22.3 x 13.6 inch			
Weight ³	85 kg / 187.4 lbs			
Installation Angle	0 ~ 15 Degrees from Vertical			
DC Inputs	MC4			
SAFETY				
Compliance	UL1741SB, UL1741SA, IEEE 1547-2018, UL1699B, UL1998, FCC Part15 ClassB, California Rule 21, Heco Rule 14H, NEC 690.12-2020, CAN/CSA C22.2107.1-1			

1. "Output Voltage Range" may differ according to specific grid standard.

2. "Output Frequency Range" may differ according to specific grid standard.

3. "Net Weight" tolerance \pm 1kg

4. Any system with a DC/AC ratio being less than 2 is within our warranty scope. Please contact local CSI Solar technical support for further confirmation if otherwise.

The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to on-going innovation, research and product enhancement, CSI Solar Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

Caution: For professional use only. The installation and handling of PV equipment requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the product.