

Preliminary



## Energy Storage Solution

# Megawatt PCS / EPCS1500

- 1200-1725 kVA power capacity with 480-690 VAC
- Scalable system configuration and battery technology independence
- Designed for utility-grade energy storage applications



Utility Grid



PV Plant



Factory



# Optimizing the Value & Efficiency of Energy Storage System

Delta Power Conditioning System (PCS) is a bi-directional energy storage inverter for grid applications including power backup, peak shaving, PV self-consumption, PV smoothing, etc. Delta Megawatt PCS provides power capacity from 1200 kVA to 1725 kVA with 98.5% efficiency.

Featuring high availability and adaptability, the PCS is battery technology independent and can control energy storage system exactly when it is required.



## Applications




### Renewable Power Plant Integration

- Ramp rate control
- Energy shifting
- Smoothing
- Capacity firming



### Hybridized Thermal Power Plant

- Black start
- AGC improvement

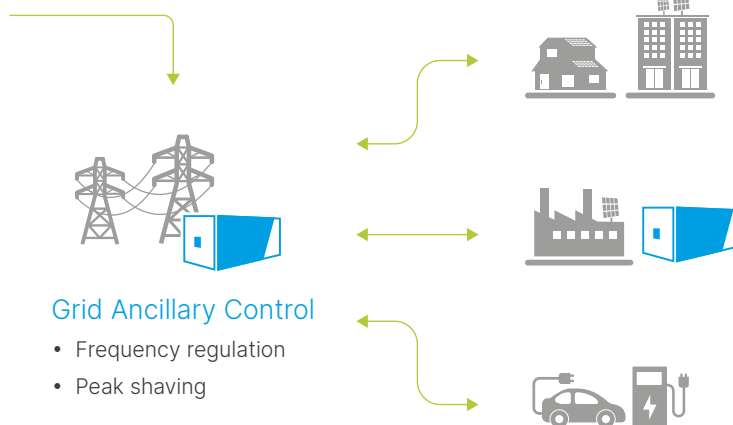


### Grid Ancillary Control

- Frequency regulation
- Peak shaving

### Distributed Network and Microgrid


- Peak shaving
- Autonomous operation

## Features




### Efficient and Precise Power Control

- Power capacity: 1200-1725 kVA
- DC Voltage up to 1500V
- AC voltage: 480-690 Vac
- Peak efficiency: 98.4%

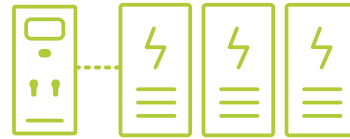

### Flexible System Configuration

- Modular design realizes scalability and availability
- Battery independence provide high adaptability for energy storage

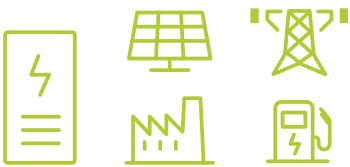

### Designed for Energy Storage Applications

- Advanced P/Q, Frequency/Voltage, and VSG control
- Utility-grade protection designed for harsh environment
- DC and AC-coupled storage applications
- Automatic voltage and frequency regulation
- Active and reactive power compensation
- Anti-Islanding detection, islanding control operation

## Operating Modes

### 1. Power Dispatch

Respond to external power demand and meet the system load at the short-term determination.

### 2. Peak Shaving

Schedule for shaving the peak and avoiding high demand charge once detected consumption overload.


### 3. Frequency-Watt / Voltage-Watt / Voltage-Var

Monitor grid frequency or voltage continuously and adjust its output power based on the user-configured parameters dynamically.

### 4. Standalone

With an external UPS supplying emergency power, PCS can black start and continuously provide power from battery to critical loads.

## Product at a Glance

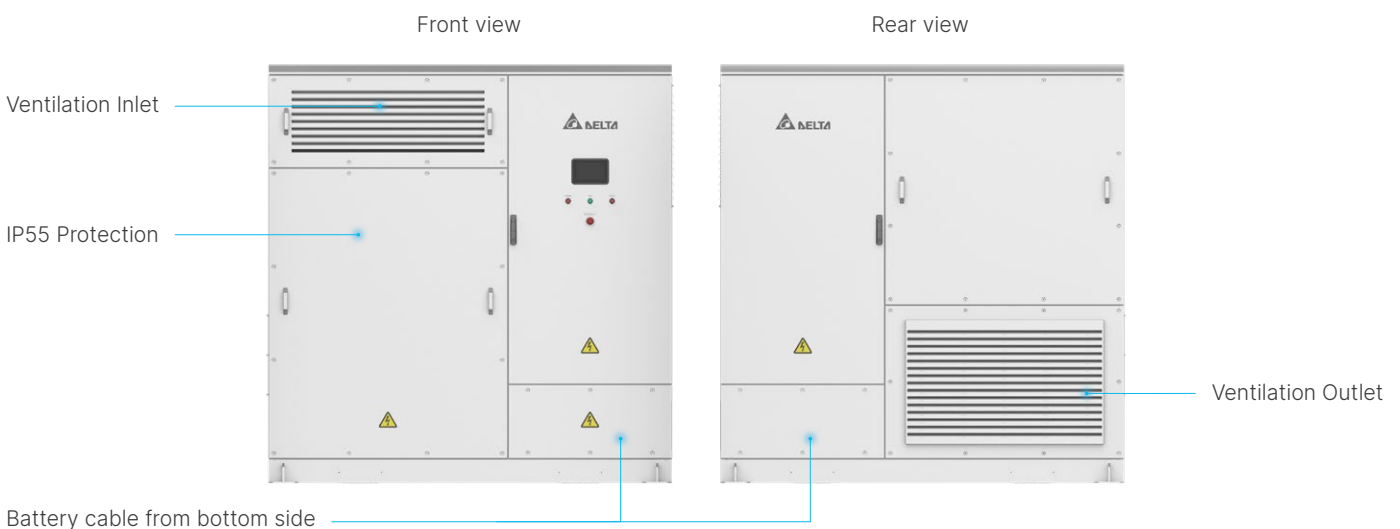

# Specifications

Part Number	EPCS-1200US	EPCS-1500US	EPCS-1725US
<b>DC Connection</b>			
Full Power DC Voltage Range <sup>(1)</sup>	679 - 1500 V	849 - 1500 V	976 - 1500V
Max DC Charge Current @50°C	1741 A		
Max DC Discharge Current @50°C	1794 A		
Max. Number of DC Input	2		
<b>AC Connection</b>			
AC Output Power @50°C	1200 kW / kVA	1500 kW / kVA	1725 kW / kVA
Max Ac Output Continuous Current @50°C	1604 A		
Normal Grid Voltage Vrms <sup>(2)</sup>	480 V	600 V	690 V
Normal Grid Frequency	50 / 60 Hz		
Current Harmonic Distortion (THDi) <sup>(3)</sup>	<3% IEEE519		
Power Factor	Four quadrants		
<b>Efficiency</b>			
Max. Efficiency	98.35%	98.50%	98.52%
CEC Efficiency	98.14%	98.37%	98.38%
<b>Protection</b>			
DC Side	DC load switch + DC fuse		
AC Side	AC circuit breaker		
DC Overvoltage	Surge arrester, Type 1 (as UL 1449)		
AC Overvoltage	Surge arrester, Type 1 (as UL 1449)		
Ingress Protection	Type 3R / IP55 / IP34 / IP34 electronics / air duct / connection area		
<b>General</b>			
Dimensions (W x H x D)	2200 × 2260 × 1100 mm		
Weight Appr.	2600 kg		
<b>Environment</b>			
Operating Temperature <sup>(4)</sup>	-30°C to +55°C		
Storage Temperature	-30°C to +70°C		
Relative Humidity	0% to 100% RH, non-condensing		
Altitude <sup>(5)</sup>	< 4000 m		
Acoustic Noise (1m)	< 79 dB(A) @25°C, full power		
Cooling	Forced air cooling		
<b>Compliance</b>			
Safety	UL 1741		
Grid Interconnection	IEEE1547 : 2018 / UL1741 SB		

\* Specifications are subject to change without prior notice

\* Subject to change based on customer's requirements

(1) Minimum DC voltage for normal grid AC voltage and power factor=1, The minimum DC voltage depends on AC voltage and power factor

(2) The PCS only allows access to the distribution grid through upstream isolated transformer

(3) THDi at nominal power

(4) Power de-rating above 50°C

(5) Power de-rating above 2000m



## Delta Electronics (Americas), Ltd.

46101 Fremont Blvd, Fremont, CA 94538, U.S.A.

Sales : (510) -668-5118 / Support : (877) 442-4732

PCS@deltaww.com

More information

[www.delta-americas.com](http://www.delta-americas.com)



2022/07