

# SINGLE PHASE STRING INVERTER

**5000W**

## KEY FEATURES



Standard Warranty, Extension up to 20 Years



### Enhance Solar System Output

Support high current PV modules with 15A operating current.



### Max. Efficiency 98%

H6 Plus high efficient topology with Max. efficiency 98%, Europe 97.5%.



### User Friendly


Low weight allows one person installation.  
Real-time monitoring with Cloud platform.  
Supports one-click inverter configuration.  
Supports remote parameter configuration & firmware update.



### Higher Reliability

Integrated power module design.  
Integrated DC switch.  
Natural convection.  
IP65.

## CSI-5K-S22003-E EFFICIENCY CURVE

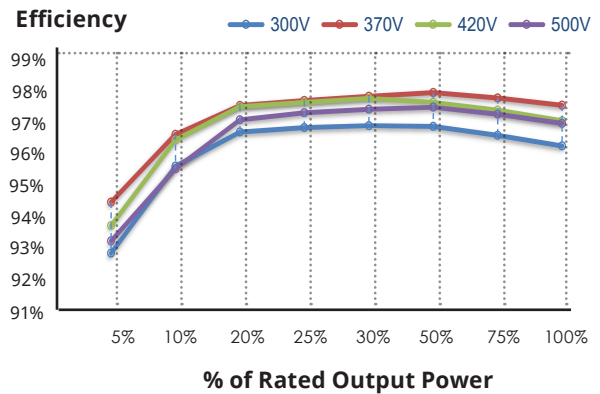

CSI Solar Co., Ltd. is committed to providing high quality solar products, solar system solutions and services to customers around the world. Canadian Solar was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey, and is a leading PV project developer and manufacturer of solar modules, with over 63 GW deployed around the world since 2001.

\* For detail information, please refer to Installation Manual.

**SYSTEM TECHNICAL DATA**

<b>MODEL NAME</b>	<b>CSI-5K-S22003-E</b>
<b>DC INPUT</b>	
Max. DC Input Voltage (V)	600
Start-up DC Input Voltage (V)	110
MPPT Operating Voltage Range (V)	100 - 500
Rated Input Voltage (V)	360
Max. Input Current (A)	15 / 15
Max. Short-Circuit Current (A)	18.8 / 18.8
Number of MPP Trackers	2
Number of DC Inputs	1 / 1
<b>AC OUTPUT</b>	
Rated Output Power (W)	5000
Max. Output Power (W)	5500
AC Grid Connection Type	L / N / PE
AC Nominal Voltage And Range (V)	220 / 230 / 240 (180 - 280)
AC Nominal Frequency And Range (Hz)	50 / 60 (± 5)
Max. Output Current (A)	22.7
Power Factor (@Rated Output Power)	> 0.99
Displacement Power Factor	0.8 leading to 0.8 lagging
Total Harmonic Distortion (THDi)	< 3 %
<b>EFFICIENCY</b>	
Max. Efficiency	98.0 %
European Efficiency	97.5 %
<b>SAFETY &amp; PROTECTION</b>	
DC Switch	Integrated
Anti-Islanding Protection	Integrated
DC Reverse-Polarity Protection	Integrated
Insulation Monitoring	Integrated
AC Over Voltage Protection	Integrated
AC Over Current Protection	Integrated
AC Short-Circuit Protection	Integrated
Residual Current Protection	Integrated
Overvoltage Class	II(DC), III(AC)
<b>GENERAL PARAMETERS</b>	
Dimensions (W x H x D, mm)	355 x 435 x 158
Net Weight (kg)	13.5
Installation Method	Wall-mounted
DC Connection Type	MC4
AC Connection Type	Connector
Communication	WIFI / RS485
Display	LED + APP
Cooling	Natural Convection
Protection Degree	IP65
Operating Ambient Temperature Range (°C)	-25 ~ 60 (> 45, derating operation)
Relative Humidity (Non-Condensing)	0 % ~ 100 %
Max. Operating Altitude (m)	4000 (> 3000, derating operation)
Topology	Transformerless
Night Power Consumption (W)	< 1
Safety and EMC	IEC 62109-1/2
Grid Connection Standard	ABNT NBR 16149/16150:2013

\*Any system with a DC/AC ratio being less than 1.5 is within our warranty scope. Please contact local CSI Solar technical support for further confirmation if otherwise.

The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without notice.  
Caution: For professional use only. The installation and handling of PV equipment requires professional skills and should only be performed by qualified professionals. Please read the safety and installation instructions before using the product.

**CSI Solar Co., Ltd.**

199 Lushan Road, SND, Suzhou, Jiangsu, China, 215129, [www.csisolar.com](http://www.csisolar.com), [service.inverter@csisolar.com](mailto:service.inverter@csisolar.com)

April 2022. All rights reserved, PV Inverter Product Datasheet V1.0\_EN